


pierścień zewnętrzny INOX  
DIN 471

UWAGI:

- A2
- A4

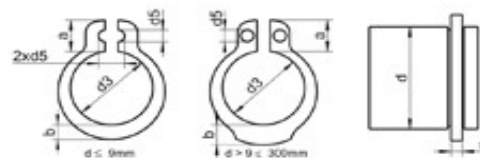

D	d3	d5min	a max	b-	s	A2	D	d3	d5min	a max	b-	s	A2
3	2.7	1.0	1.9	0.8	0.40	●	52	47.8	2.5	7.0	5.2	2.0	●
4	3.7	1.0	2.2	0.9	0.40	●	55	50.8	2.5	7.2	5.4	2.0	●
5	3.7	1.0	2.5	1.1	0.60	●	60	55.8	2.5	7.4	5.8	2.0	●
6	5.6	1.2	2.7	1.3	0.70	●	65	60.8	3.0	7.8	6.3	2.5	●
7	6.5	1.2	3.1	1.4	0.80	●	70	65.5	3.0	8.1	6.6	2.5	●
8	7.4	1.2	3.2	1.5	0.80	●	75	70.5	3.0	8.4	7.0	2.5	●
9	8.4	1.2	3.3	1.7	1.00	●	80	74.5	3.0	8.6	7.4	2.5	●
10	9.3	1.5	3.3	1.8	1.00	●	85	79.5	3.5	8.7	7.8	3.00	●
11	10.2	1.5	3.3	1.8	1.00	●	90	84.5	3.5	8.8	8.2	3.00	●
12	11.0	1.7	3.3	1.8	1.00	●	95	89.5	3.5	9.4	8.6	3.00	●
13	11.9	1.7	3.4	2.0	1.00	●	100	94.5	3.5	9.6	9.0	3.00	●
14	12.9	1.7	3.5	2.1	1.00	●	105	98.0	3.5	9.9	9.3	4.00	●
15	13.8	1.7	3.6	2.2	1.00	●	110	103.0	3.5	10.1	9.6	4.00	●
16	14.7	1.7	3.7	2.2	1.00	●	120	113.0	3.5	11.0	10.2	4.00	●
17	15.7	1.7	3.8	2.3	1.00	●	130	123.0	4.0	11.6	10.7	4.00	●
18	16.5	2.0	3.9	2.4	1.20	●	140	133.0	4.0	12.0	11.2	4.00	●
19	17.5	2.0	3.9	2.5	1.20	●							
20	18.5	2.0	4.0	2.6	1.20	●							
22	20.5	2.0	4.2	2.8	1.20	●							
23	21.4	2.0	4.3	2.9	1.20	●							
24	22.2	2.0	4.4	3.0	1.20	●							
25	23.2	2.0	4.4	3.0	1.20	●							
26	24.2	2.0	4.5	3.1	1.20	●							
27	25.1	2.0	4.6	3.1	1.20	●							
28	25.9	2.0	4.7	3.2	1.50	●							
29	26.9	2.0	4.8	3.4	1.50	●							
30	27.9	2.0	5.0	3.5	1.50	●							
32	29.6	2.5	5.2	3.6	1.50	●							
34	31.5	2.5	5.4	3.8	1.50	●							
35	32.2	2.5	5.6	3.9	1.50	●							
36	33.2	2.5	5.6	4.0	1.75	●							
38	35.2	2.5	5.8	4.2	1.75	●							
39	36.0	2.5	5.9	4.3	1.75	●							
40	36.5	2.5	6.0	4.4	1.75	●							
42	38.5	2.5	6.5	4.5	1.75	●							
45	41.5	2.5	6.7	4.7	1.75	●							
48	44.5	2.5	6.9	5.0	1.75	●							
50	45.8	2.5	6.9	5.1	2.0	●							